



**PREPARING THE LUMINAIRE**

**SURFACE LUMINAIRE: BL100 "LED"**


**SAVE THIS INSTRUCTIONS**

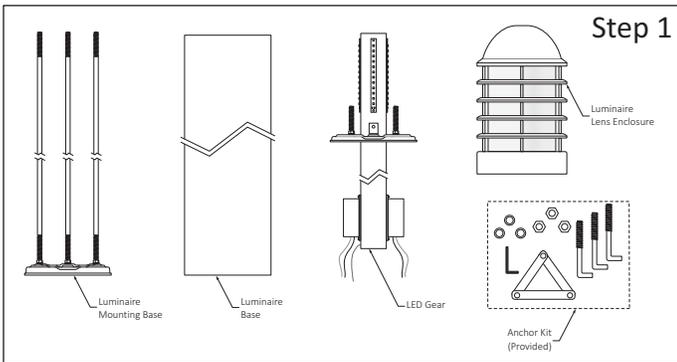

**Step 1 - Disassemble Luminaire Parts for easy Installation:**  
 a.- Remove Luminaire Base and Lens Enclosure to install the Base.

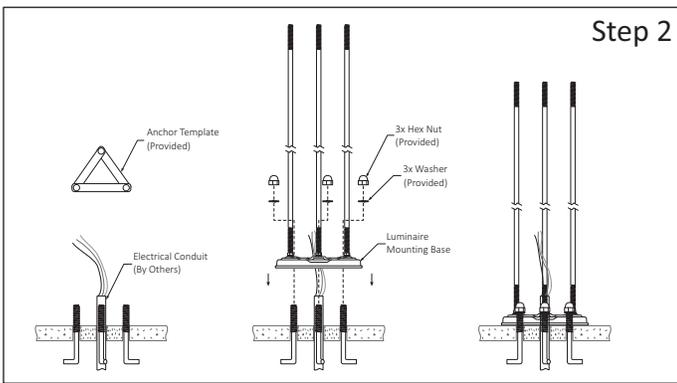

**Step 2 - Install Anchors Luminaire Mounting Base:**  
 a.- Set up the Surface using Anchor Kit (provided). Install a Electrical Conduit and run Input Wires through the Conduit (By others).  
 b.- Place Luminaire Base allowing the Anchors pass through the Base Holes and secure it using the 3 Washer and Hex Nuts (provided).

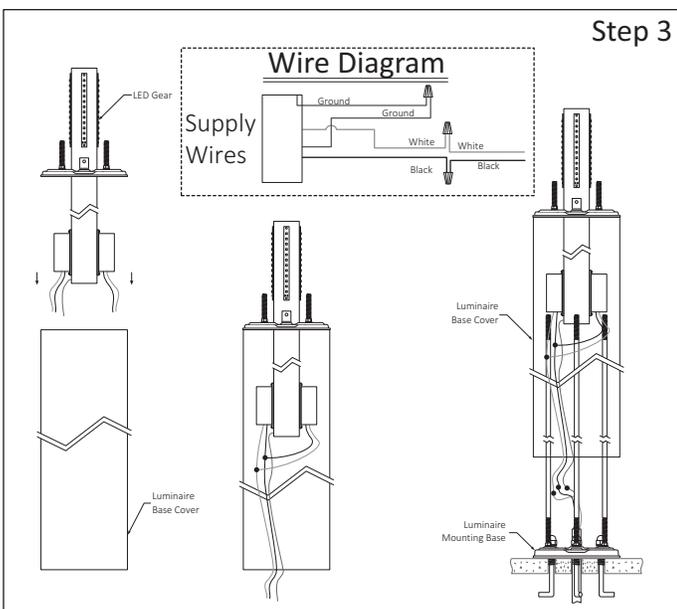


**Step 3 - Install Base Cover/Make Wiring Connections:**  
 a.- Insert Luminaire Base Cover through the Base and let it rest down.  
 b.- Place Base Cover close to the Base and make hard-wire connections, see Wire Diagram.


READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLATION. IF YOU ARE NOT FAMILIAR WITH THE NATIONAL ELECTRICAL CODE (NEC), CONTACT A QUALIFIED ELECTRICIAN TO INSTALL THIS LUMINAIRE.

**WARNING.-** Before installing this luminaire or doing any maintenance, turn off the power supply at the circuit breaker or fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

**NOTE:**  
 To re-lamp, replacement parts or additional information, contact or visit manufacturer at [www.lumux.net](http://www.lumux.net)

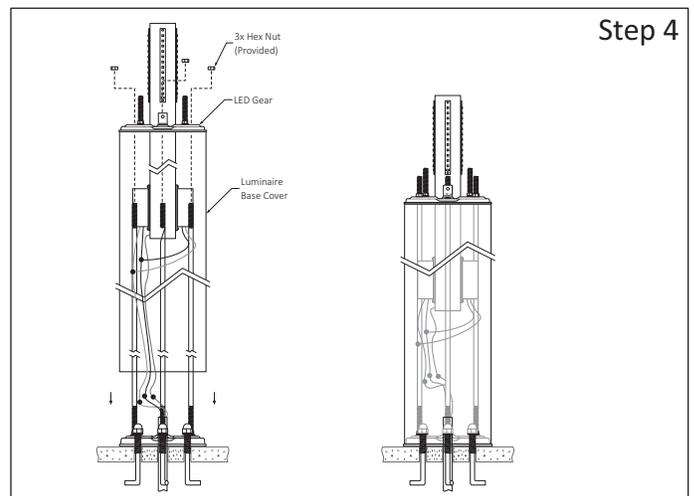

**Step 4 - Install Luminaire Base Cover:**  
 a.- Insert Lens Base into the Luminaire Base, align the three holes allowing the Bolts pass through the Gear Holes and secure it using the 3 Hex Nuts (provided).

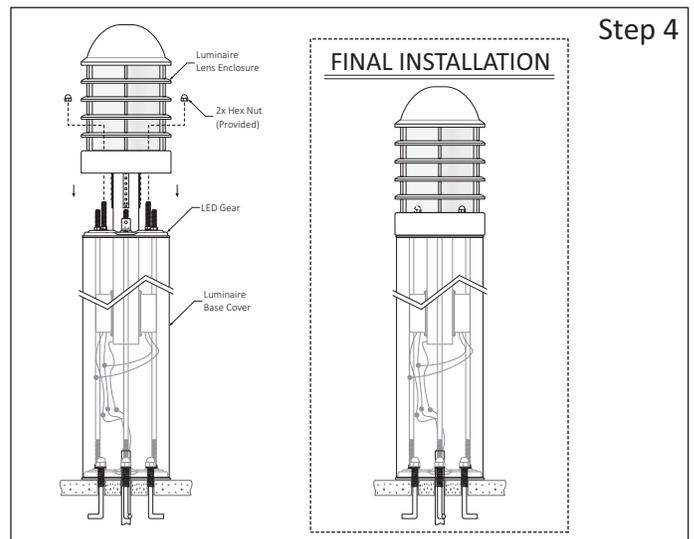

**Step 4 - Install Luminaire Lens Enclosure:**  
 a.- Insert Lens Enclosure into the LED Gear, align the two holes allowing the Bolts pass through the Holes and secure it using the 2 Hex Nuts (provided).