

LUMUX

BOLLARD

BL110

The Lumux Bollard ("BL") series is a family of precision engineered, architectural LED bollards offered in a wide variety of form factors. Intended to illuminate a variety of outdoor spaces, whether public or private, the Lumux Bollard line offers multiple light distributions, including 360-degree shielded or unshielded, symmetric, and downward facing light. The body is constructed from heavy-duty die-cast aluminum or grade 316 stainless-steel, seamlessly integrated with its light source in a sleek, symmetrical design with no visible hardware. The Lumux Bollard combines form and function, offering architectural grade design while utilizing the highest quality of materials and components, providing long-lasting stability and durability that meets the most rigorous standards.

Housing: Heavy-duty construction of corrosion resistant, grade 316 stainless steel. Top cap fastened to the body with vandal resistant stainless-steel screws.

Lens: Sealed one-piece, shatter proof, UV-rated polycarbonate lens

Mounting: Secures with galvanized anchor bolts

Installation: Mounting footplate (refer to diagram)

Finish: Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

Driver: Constant current and universal input voltage 120/277V, starting temperature rated at -20°F. Dimmable option available (0-10v).

Gasket: Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

Protection Class: IP65, ETL Listed for wet locations

Wattage: 17.6W

Color Temperature: 2700K / 3000K / 3500K / 4000K

| Delivered Lumens: | 2700K | 3000K | 3500K | 4000K |
|-------------------|-------|-------|-------|-------|
| | 232Lm | 258Lm | 300Lm | 344Lm |

CRI: 90

Warranty: 5 year limited warranty

DATE:

PROJECT:


FIRM:

CATALOG NO.:

COMMENTS:



Dimensions:

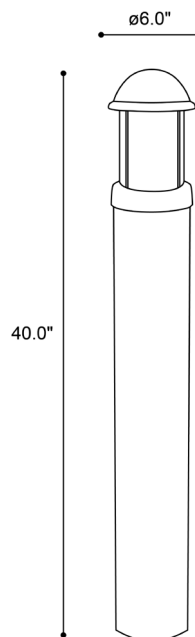

LUMUX

BOLLARD

BL110

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:

Ordering Guide:


| Catalog No. | LED Color | Color Temp ¹ | Voltage | Finish | Options ² |
|-------------|-----------|-------------------------|---------|-------------------------|--|
| BL110 | White | 2700K | 120/277 | Stainless Steel | <input type="checkbox"/> Dimmable driver (0-10v) |
| | Amber | 3000K | | Black | |
| | | 3500K | | White | |
| | | 4000K | | Silver | |
| | | | | Bronze | |
| | | | | Custom RAL ² | |

¹Consult factory for additional options

²Consult factory for additional pricing

Catalog No.: _____

Anchor Bolts foot print:

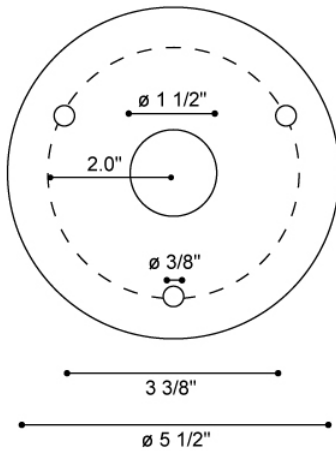

Content of specification sheet subject to change