

LUMUX

UP DOWNS

DL300

The Lumux DL300 is a precision engineered architectural LED wall mounted fixture offering direct and indirect light from a single form-factor with no visible hardware in a sleek, symmetrical design. The fixture is constructed with the highest quality of specification grade materials and component parts, while a shielded light source enhances visual comfort. This fixture is offered in two sizes, while the larger DL300-2 offers a larger housing that supports an integral emergency battery pack.

Housing: Heavy-duty construction of one-piece, corrosion resistant, low-copper (<1% copper) die-cast aluminum. Enclosed lens secured with vandal resistant, stainless-steel screws.

Lens: 1/8" thick shatter proof clear glass diffuser

Mounting: Wall mounted

Installation: Mounting footplate

Finish: Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color.

Driver: Constant current and universal input voltage 120/277V, starting temperature rated at -20°F.

Gasket: Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

Protection Class: IP65, ETL Listed for wet locations

Wattage: 30W

Color Temperature: 2700K / 3000K / 3500K / 4000K

Delivered Lumens:

2700K	3000K	3500K	4000K
1950Lm	2175Lm	2500Lm	2900Lm


CRI: 90

Warranty: 5 year limited warranty




Dimensions:

DL300

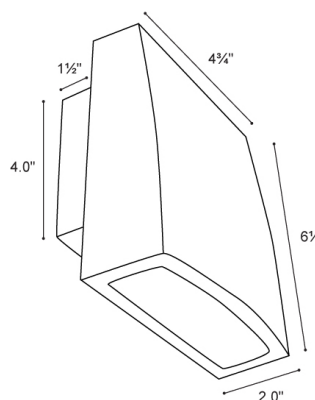

DL300-2

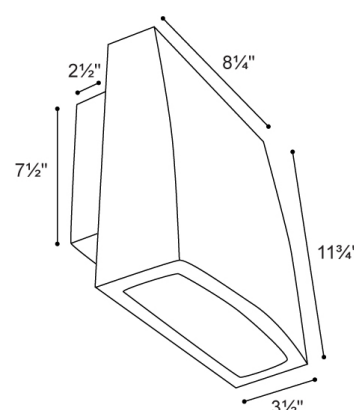

LUMUX

UP DOWNS

DL300

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:

Ordering Guide:


Catalog No.	LED Color	Color Temp ¹	Voltage	Finish	Options ²
DL300	White	2700K	120/277	Black	<input type="checkbox"/> Emergency Battery Pack <input type="checkbox"/> Photocell
DL300-2		3000K		White	
		3500K		Silver	
		4000K		Bronze	
				Custom RAL ²	

¹Consult factory for additional options

²Consult factory for pricing


Catalog No.: _____

Lighting Distribution Pattern:

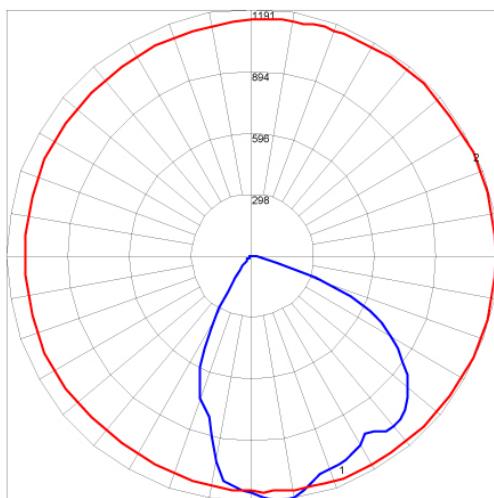

Maximum Candela = 1191.4. Located At Horizontal Angle = 0, Vertical Angle = 7.5
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
 # 2 - Horizontal Cone Through Vertical Angle (7.5) (Through Max. Cd.)

Pendent Details:

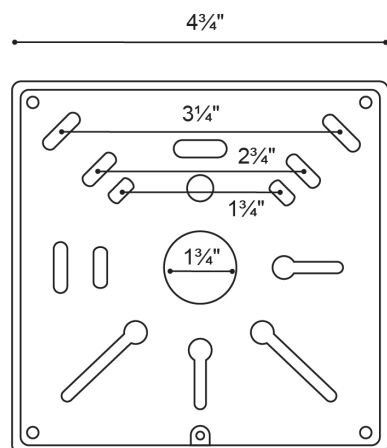

Content of specification sheet subject to change