

LUMUX

FLOOD LIGHTS

FL300

The Lumux FL300 is a low-wattage, small footprint flood light used for wall washing and accent lighting of facades.

Constructed from grade 316 stainless steel, the FL300 offers high intensity performance in a compact body and features a minimal, modern design. This unit is designed for long lasting indoor and outdoor applications.

Housing: Heavy-duty construction of one-piece, corrosion resistant, grade 316 stainless-steel. Enclosed lens. Utilizes vandal resistant, stainless-steel screws.

Lens: 1/8" thick shatter proof clear glass diffuser, anodized aluminum reflector

Mounting: Surface mounted

Installation: Installs into a standard j-box

Finish: Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color.

Driver: Constant current and universal input voltage 120/277V, starting temperature rated at -20°F.

Gasket: Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

Protection Class: IP65, ETL Listed for wet locations

Wattage: 3W

Color Temperature: 2700K / 3000K / 3500K / 4000K

Delivered Lumens:	2700K	3000K	3500K	4000K
	90Lm	100Lm	110Lm	120Lm

CRI: 90

Warranty: 5 year limited warranty

DATE:

PROJECT:


FIRM:

CATALOG NO.:

COMMENTS:



Dimensions:

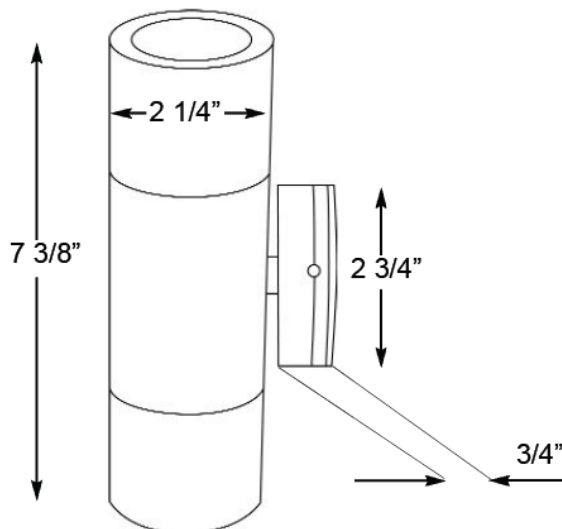

LUMUX

FLOOD LIGHTS

FL300

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:

Ordering Guide:

Catalog No.	LED Color	Color Temp ¹	Voltage	Finish
FL300	White	2700K	120/277	Stainless Steel
		3000K		Black
		3500K		White
		4000K		Silver
				Bronze
				Custom RAL ²

¹Consult factory for additional options

²Consult factory for additional pricing

Catalog No.: _____