

# Lumux

## Description

Corrosion resistant die-cast aluminum alloy body & frame. Thermal shock resistant safety glass in hinged low copper die-cast aluminum frame. Weatherproof and durable silicone rubber gasket. High purity anodized reflector chemically brightened. Ultraviolet stabilized polyester powder coat finish.

|               |        |
|---------------|--------|
| Rev : A       | Date : |
| Project :     | Type:  |
| Agency :      |        |
| Distributor : |        |

## Specification Features

### Construction

Low copper aluminum die cast. Vandal resistance screws. Silicon gasket.

### Electrical

Incandescent : medium base porcelain socket with nickel plated screws shell supplied with 200 Degree C high temperature leads.

Compact Fluorescent : G23-2 - G24Q-4  
Metal Halide: Med. Base.or Mogul Base  
Porcelain with nickel plated screw. Rated 600 Volt, 4KV pulse rated.

### Diffuser

Tempered safety shock glass


### Finish

Polyester powder COat.

## Ordering Guide

|         | Lamp                                                  | / | Voltage    | / | Finish | / | Option |
|---------|-------------------------------------------------------|---|------------|---|--------|---|--------|
| FL100 / | Inc.<br>PL42/PL57<br>MH100<br>MH150<br>MH250<br>MH400 |   | 120<br>277 |   | Black  |   |        |

# FL

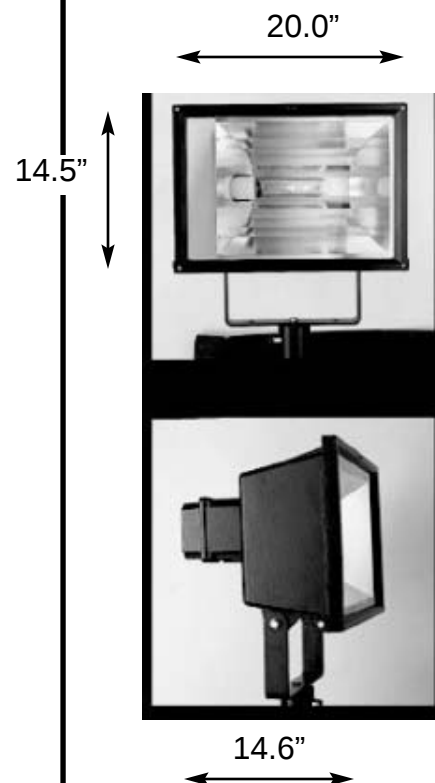

**Incandescent.  
Compact Fluorescent.  
Metal Halide.**