

# LUMUX

## WALL SCONCES

L155

The Lumux L series combines architectural design and quality with high performance, and features a range of vandal resistant, wall and ceiling mounted luminaires with a variety of grill and visor options. Designed for accent lighting of walls and facades, the Lumux L series is constructed from the highest quality components and is built for optimal performance in any environment while offering elegant and attractive form factors.

**Housing:** Heavy-duty construction of one-piece, corrosion resistant, low-copper (<1% copper) die-cast aluminum. Enclosed lens secured with vandal resistant, stainless-steel screws.

**Lens:** One-piece, 1/8" thick shatter proof frosted glass

**Mounting:** Surface mounted, wall or ceiling

**Installation:** Mounting bracket provided that fits any standard 3.0" or 4.0" J-Box

**Finish:** Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

**Driver:** Constant current and universal input voltage 120/277V, starting temperature rated at -20°F. Dimmable option available (0-10v).

**Gasket:** Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

**Protection Class:** IP65, ETL Listed for wet locations

**Wattage:** 21W

**Color Temperature:** 2700K / 3000K / 3500K / 4000K

**Delivered Lumens:** 2700K 3000K 3500K 4000K  
799Lm 866Lm 1010Lm 1154Lm

Please consult factory for higher lumen packages


**CRI:** 90

**Warranty:** 5 year limited warranty

DATE:	
PROJECT:	
FIRM:	
CATALOG NO.:	
COMMENTS:	



### Dimensions:

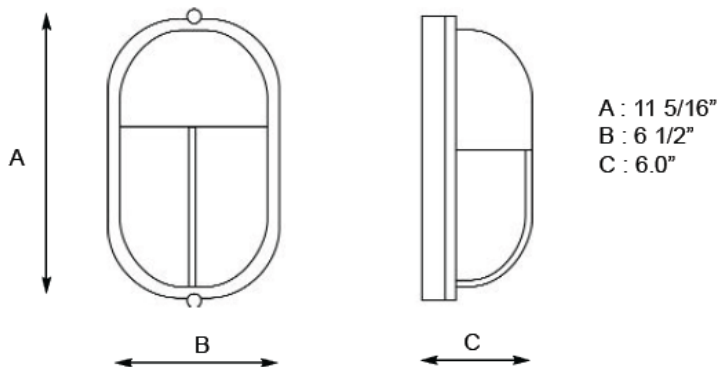

# LUMUX

## WALL SCONCES

L155

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:

### Ordering Guide:

Catalog No.	LED Color	Color Temp <sup>1</sup>	Voltage	Finish	Options <sup>2</sup>
L155	White	2700K	120/277	Black	<input type="checkbox"/> Dimmable driver (0-10v) <input type="checkbox"/> Photocell <input type="checkbox"/> 1/2" KO on the sides
	Amber	3000K		White	
		3500K		Silver	
		4000K		Bronze	
				Custom RAL <sup>2</sup>	

<sup>1</sup>Color Temperature applies only to White LED Color

<sup>2</sup>Consult factory for additional pricing

Consult factory for compact fluorescent options

Catalog No.: \_\_\_\_\_