LUMUX

STEP LIGHTS
SL800

The Lumux SL800 series is a family of precision engineered, recessed LED architectural step lights that are designed for durability and performance. Constructed from the highest quality materials and components, this step light offers a larger body, enabling higher wattage and lumen output, and is large enough to support an integral emergency battery pack. A diecast aluminum body is seamlessly integrated with its faceplate with captive, vandal resistant stainless-steel screws. This step light features a frosty glass diffuser, reducing glare, and is energy efficient for long-lasting indoor and outdoor applications.

Housing: Heavy-duty construction of corrosion resistant, low-copper die cast aluminum. Faceplate secured with vandal resistant, stainless-steel screws.

Lens: 1/8" thick shatter-proof frosty glass diffuser

Mounting: Recessed wall or concrete pour; masonry installation is also an option

Installation: Unit is provided with auminum diecast concrete pour box (see diagram for dimensions). Housing provided with ½" conduit opening.

Finish: Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

Driver: Constant current and universal input voltage 120/277V, starting temperature rated at -20°F. Dimmable option available (0-10v).

Gasket: Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

Protection Class: IP65, ETL Listed for wet locations

Wattage: 25W

Color Temperature: 2700K / 3000K / 3500K / 4000K

Delivered Lumens:

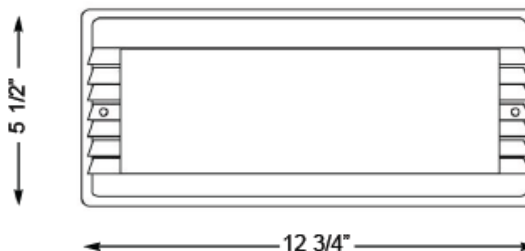| 2700K	3000K	3500K	4000K
371Lm	412Lm	480Lm	549Lm

CRI: 90

Warranty: 5 year limited warranty

Dimensions:

MADE IN USA · ETL Intertek Listed US · IP 65 · Quick Ship

5 YEAR WARRANTY · Wet · MARINE GRADE · TURTLE FRIENDLY

EMERGENCY BATTERY BACKUP AVAILABLE

5 1/2"

12 3/4"

3.0"

5 1/2"

LUMUX

STEP LIGHTS
SL800

Ordering Guide:

Catalog No.	LED Color	Color Temp[1]	Voltage	Finish	Options[2]
SL800	White	2700K	120/277	Black	☐ Dimmable driver (0-10v)
		3000K		White	☐ Integral Emergency Battery Pack
		3500K		Silver	
		4000K		Bronze	
				Custom RAL[2]	

[1] Color Temperature applies only to White LED Color
[2] Consult factory for additional options

Catalog No.: _____