

# LUMUX

## PATH LIGHTS

### PL300

The Lumux PL300 is a precision engineered, surface-mounted architectural LED fixture that is designed for durability and performance. Constructed from the highest quality materials and components, the PL300 is a powerful solution for path and landscape lighting. It features a die cast aluminum body, vandal resistant stainless-steel hardware, and a clear polycarbonate diffuser. It also features a unique, conic design, and offers a high lumen output and could be specified for widespread surface light distribution. The PL300 is energy efficient and durable for long-lasting exterior lighting applications.

**Housing:** Heavy-duty construction of corrosion resistant, low-copper die cast aluminum. Cover secured with vandal resistant, stainless-steel screws.

**Lens:** 1/8" thick shatter proof clear polycarbonate lens

**Mounting:** Surface mounted

**Installation:** Unit could be used as a bollard or surface ground mounted on any electrical outlet

**Finish:** Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

**Driver:** Constant current and universal input voltage 120/277V, starting temperature rated at -20°F. Dimmable option available (0-10v).

**Gasket:** Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

**Protection Class:** IP65, ETL Listed for wet locations

**Wattage:** 24W

**Color Temperature:** 2700K / 3000K / 3500K / 4000K

Delivered Lumens:	2700K	3000K	3500K	4000K
	835Lm	930Lm	1085Lm	1240Lm


**CRI:** 90

**Warranty:** 5 year limited warranty

DATE: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
FIRM: \_\_\_\_\_  
CATALOG NO.: \_\_\_\_\_  
COMMENTS: \_\_\_\_\_



#### Dimensions:

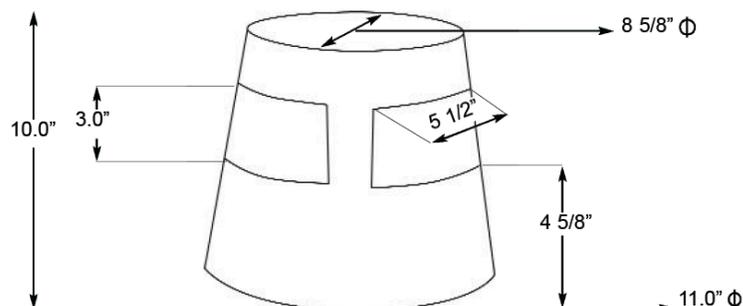

# LUMUX

## PATH LIGHTS

PL300

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:

### Ordering Guide:

Catalog No.	LED Color	Color Temp <sup>1</sup>	Voltage	Finish	Options <sup>2</sup>
PL300	White	2700K	120/277	Black	<input type="checkbox"/> Dimmable driver (0-10v) <input type="checkbox"/> 180° Shield
		3000K		White	
		3500K		Silver	
		4000K		Bronze	
				Custom RAL <sup>2</sup>	

<sup>1</sup>Consult factory for additional options

Catalog No.: \_\_\_\_\_