

# LUMUX

## PATH LIGHTS

### PL500

The Lumux PL500 is a precision engineered, inground LED architectural fixture that is designed for durability and performance. Constructed from the highest quality materials and components, the PL500 is a low-wattage solution for path, landscape, and façade lighting applications. A grade 316 stainless-steel cover is fastened to the body with vandal resistant, stainless-steel screws. The PL500 offers four different specification options for its cover – one, two, three, or four openings – to achieve the desired light angle and distribution. It offers a clear tempered glass diffuser to reduce glare and enhance visual comfort and is energy efficient and durable for long-lasting applications.

**Housing:** Heavy-duty construction of corrosion resistant, low-copper aluminum die cast. A grade 316 stainless-steel cover is secured with vandal resistant, stainless-steel screws.

**Lens:** 1/8" thick shatter proof clear glass diffuser

**Mounting:** Inground

**Installation:** Unit is provided with its own polymer rough-in-box

**Finish:** Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

**Driver:** Constant current and universal input voltage 120/277V, starting temperature rated at -20°F.

**Gasket:** Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

**Protection Class:** IP65, ETL Listed for wet locations

**Wattage:** 3W

**Color Temperature:** 2700K / 3000K / 3500K / 4000K

Delivered Lumens:	2700K	3000K	3500K	4000K
	63Lm	70Lm	75Lm	80Lm

**CRI:** 90

**Warranty:** 5 year limited warranty

DATE:

PROJECT:


FIRM:

CATALOG NO.:

COMMENTS:



#### Dimensions:

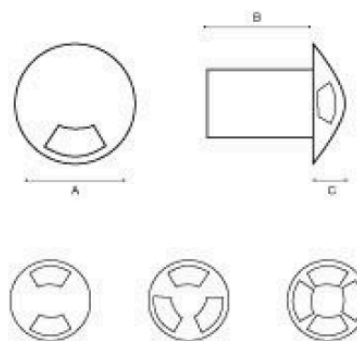

A= 3 1/2" B= 2 1/2" C= 1.0"

# LUMUX

## PATH LIGHTS

PL500

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:

### Ordering Guide:


Catalog No.	LED Color	Color Temp <sup>1</sup>	Voltage	Finish	Options <sup>2</sup>
PL500	White	2700K	120/277	Stainless Steel	<input type="checkbox"/> One Opening <input type="checkbox"/> Two Openings <input type="checkbox"/> Three Openings <input type="checkbox"/> Four Openings
	Amber	3000K		Black	
		3500K		White	
		4000K		Silver	
				Bronze	
				Custom RAL <sup>2</sup>	

<sup>1</sup>Consult factory for additional options

<sup>2</sup>Consult factory for pricing

Catalog No.: \_\_\_\_\_

### Lighting Distribution Pattern:

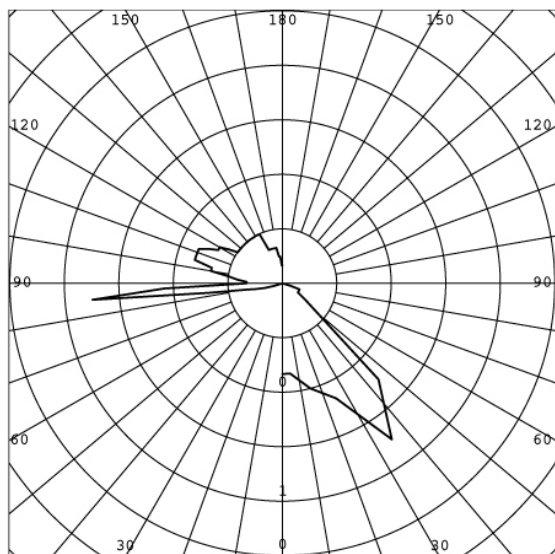

### Concrete Pour Box (CPX):



Content of specification sheet subject to change