# LUMUX

# DATE: PROJECT: FIRM: CATALOG NO.: COMMENTS:

# **STEP LIGHTS**

**SL532SS** 

The Lumux SL500 series is a family of precision engineered, recessed LED architectural step lights that are designed for durability and performance. Constructed from the highest quality materials and components, this step light is offered in a wide array of form factors and grill options to fit any specification. A diecast aluminum body is seamlessly integrated with its grade 316 stainless-steel faceplate with captive, vandal resistant stainless-steel screws. This step light features a frosty glass diffuser, reducing glare, and is energy efficient for long-lasting indoor and outdoor applications.

**Housing:** Heavy-duty construction of corrosion resistant, low-copper die cast aluminum. 45-degree angled louver faceplate secured with vandal resistant, stainless-steel screws.

Lens: 1/8" thick shatter-proof frosty glass diffuser

Mounting: Recessed wall or concrete pour

**Installation:** Unit is provided with galvanized steel concrete pour box (see diagram for dimensions). Housing provided with ½" conduit opening.

**Finish:** Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

**Driver:** Constant current and universal input voltage 120/277V, starting temperature rated at -20°F. Dimmable option available (0-10v).

**Gasket:** Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

Protection Class: IP65, ETL Listed for wet locations

Wattage: 21W

Color Temperature: 2700K / 3000K / 3500K / 4000K

 Delivered Lumens:
 2700K
 3000K
 3500K
 4000K

 CRI:
 90
 137Lm
 152Lm
 178Lm
 203Lm

Warranty: 5 year limited warranty




















#### **Dimensions:**

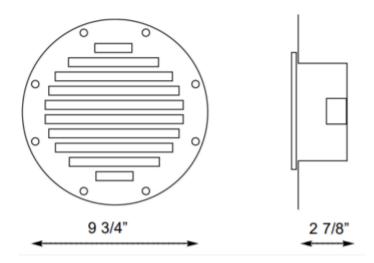



DATE:	
PROJECT:	
FIRM:	
CATALOG NO.:	
COMMENTS:	

# **STEP LIGHTS**

**SL532SS** 

### Ordering Guide:

Catalog No.	LED Color	Color Temp <sup>1</sup>	Voltage	Finish	Options <sup>2</sup>
SL532SS	White	2700K	120/277	Stainless Steel	☐ Dimmable driver (0-10v)
	Blue	3000K		Black	
	Amber	3500K		White	
		4000K		Silver	
				Bronze	
				Custom RAL <sup>2</sup>	

<sup>&</sup>lt;sup>1</sup> Color Temperature applies only to White LED Color

## Catalog No.:\_

#### Concrete Pour Box:



ø 9½"

<sup>&</sup>lt;sup>2</sup> Consult factory for additional options