

LUMUX

STEP LIGHTS

SL550SS

The Lumux SL500 series is a family of precision engineered, recessed LED architectural step lights that are designed for durability and performance. Constructed from the highest quality materials and components, this step light is offered in a wide array of form factors and grill options to fit any specification. A diecast aluminum body is seamlessly integrated with its grade 316 stainless-steel faceplate with captive, vandal resistant stainless-steel screws. This step light features a frosty glass diffuser, reducing glare, and is energy efficient for long-lasting indoor and outdoor applications.

Housing: Heavy-duty construction of corrosion resistant, low-copper die cast aluminum. Faceplate secured with vandal resistant, stainless-steel screws.

Lens: 1/8" thick shatter-proof frosty glass diffuser

Mounting: Recessed wall or concrete pour

Installation: Unit is provided with galvanized steel concrete pour box (see diagram for dimensions). Housing provided with 1/2" conduit opening.

Finish: Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

Driver: Constant current and universal input voltage 120/277V, starting temperature rated at -20°F. Dimmable option available (0-10v).

Gasket: Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

Protection Class: IP65, ETL Listed for wet locations

Wattage: 21W

Color Temperature: 2700K / 3000K / 3500K / 4000K


| Delivered Lumens: | 2700K | 3000K | 3500K | 4000K |
|-------------------|-------|-------|-------|-------|
| | 304Lm | 338Lm | 395Lm | 451Lm |

CRI: 90

Warranty: 5 year limited warranty



Dimensions:

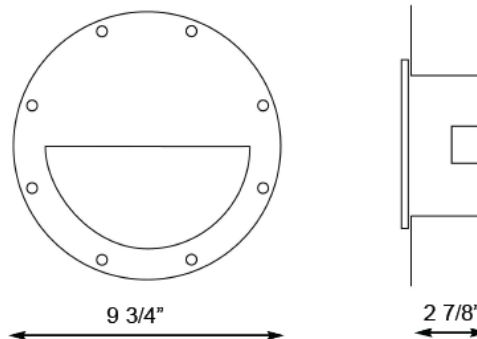

LUMUX

STEP LIGHTS

SL550SS

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:

Ordering Guide:

| Catalog No. | LED Color | Color Temp ¹ | Voltage | Finish | Options ² |
|-------------|-----------|-------------------------|---------|-------------------------|--|
| SL550SS | White | 2700K | 120/277 | Stainless Steel | <input type="checkbox"/> Dimmable driver (0-10v) |
| | Blue | 3000K | | Black | |
| | Amber | 3500K | | White | |
| | | 4000K | | Silver | |
| | | | | Bronze | |
| | | | | Custom RAL ² | |

¹ Color Temperature applies only to White LED Color

² Consult factory for additional options

Catalog No.: _____

Concrete Pour Box:

