

LUMUX

Date :

Project :

Type:

Agency :

Distributor :



Description : The first generation of our "Institutional Step lights". Fabricated from 16 Gauge die formed rolled steel housing seam welded. The grill is secured to the welded studs inside the housing via four Torx-Head screws to provide a unique vandal resistance unit fit for high abuse and security applications. ETL listed for wet location. Unit is provided with 1/2" Knock outs (KO) on each side of the unit for ease of gang installation. Unit could be specifies in Open Face or Louvered.

SPECIFICATION:

Housing : 16 Gauge Steel stainless steel .
Silicon gasketed for weather tight operation.


Diffuser : Two Polycarbonate lens

Electrical : Voltage : 120 or 277
Lamp: Compact Fluorescent, LED.
Socket : G23-2, G24Q.
Ballast : Class P, Electronic Ballast

Installation: Dry wall or concrete pour
Rough-in Box is provided.
Wall opening 11 3/4" x 5 1/8" x 4.0"
(Length, Width, Depth)

DIMENSIONS:

A = 13.0"
B = 4.0"
C = 6 1/2"

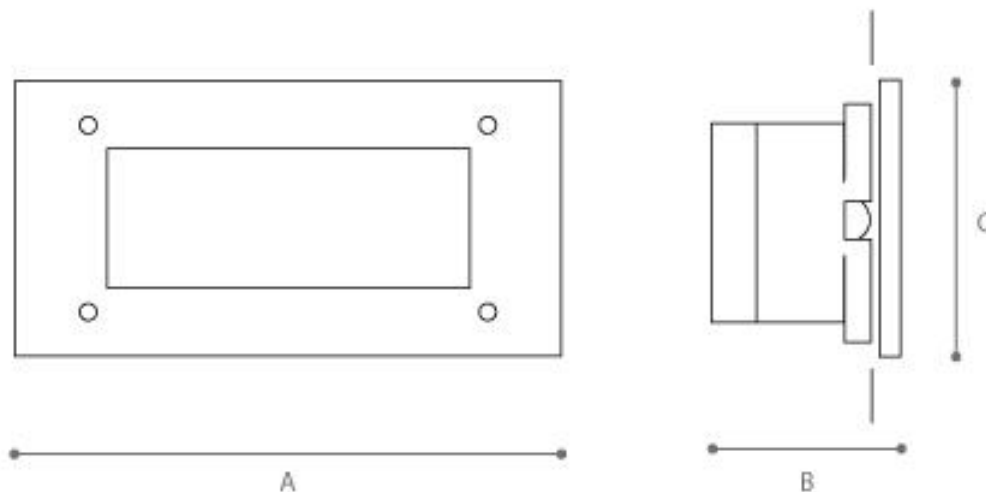

Lumux - SL600H

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc

877-895-5552

Rev : A

Drawing Number
SL600H

LUMUX

Date :

Project :

Type:

Agency :

Distributor :

ORDERING GUIDE:

SL600H / XXX / XXX / xxx / option

PL9
PL13
PL18
PL26
LED *

120
277

White
Black
Silver
Bronze
RAL
(optional)

Open Face.
Louver.

* LED has integral driver @ 120 or 277 volt

Lumux - SL600H

PROJECT NOTES:

Comments

Approval

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc

877-895-5552

Rev :A

Drawing Number
SL600H