

# LUMUX

## STEP LIGHTS

SLS550

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:



The Lumux SLS series is a family of precision engineered, surface-mounted LED architectural step lights that are designed for durability and performance. Constructed from the highest quality materials and components, this step light is offered in a wide array of form factors and grill options to fit any specification. A die cast aluminum body is seamlessly integrated with its faceplate with captive, vandal resistant stainless-steel screws. This step light features a clear glass diffuser, reducing glare, and is energy efficient for long-lasting indoor and outdoor applications.



**Housing:** Heavy-duty construction of corrosion resistant, low-copper die cast aluminum. Faceplate secured with vandal resistant, stainless-steel screws.

**Lens:** 1/8" thick shatter proof clear glass diffuser

**Mounting:** Surface mounted

**Installation:** Installs into a standard j-box (please refer to installation instructions)

**Finish:** Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

**Driver:** Constant current and universal input voltage 120V, starting temperature rated at -20°F.

**Gasket:** Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

**Protection Class:** IP65, ETL Listed for wet locations

**Wattage:** 1W


**Color Temperature:** 2700K / 3000K / 3500K / 4000K

<b>Delivered Lumens:</b>	<b>2700K</b>	<b>3000K</b>	<b>3500K</b>	<b>4000K</b>
	22Lm	25Lm	30Lm	34Lm

**CRI:** 90

**Warranty:** 5 year limited warranty

### Dimensions:

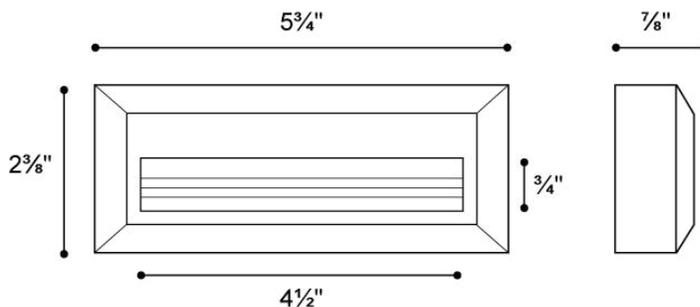

Content of specification sheet subject to change

# LUMUX

## STEP LIGHTS

SLS550

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:

### Ordering Guide:


Catalog No.	LED Color	Color Temp <sup>1</sup>	Voltage	Finish
SLS550	White	2700K	120	Black
		3000K		White
		3500K		Silver
		4000K		Bronze
				Custom RAL <sup>2</sup>

<sup>1</sup>Consult factory for additional options

<sup>2</sup>Consult factory for pricing

Catalog No.: \_\_\_\_\_

### Photometrics:

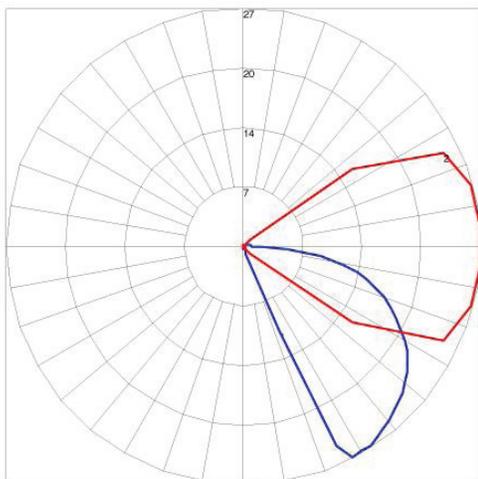

Maximum Candela = 27.1. Located At Horizontal Angle = 5, Vertical Angle = 27.5  
 # 1 - Vertical Plane Through Horizontal Angles (5 - 185) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (27.5) (Through Max. Cd.)

Content of specification sheet subject to change