

WS700SS

WALL SCONCE STAINLESS STEEL- wall / ceiling luminaire with open round trim for architectural lighting applications.

UL & CUL listed. Suitable for wet locations.

ADA compliant.

www.Lumux.net

T e l : 8 7 7 - 8 9 5 - 5 5 5 2

REV	Type:
-----	-------

B	Project:
---	----------

SPECIFICATION DATA





FIXTURE: STAINLESS STEEL TRIM WITH VANDAL
RESISTANT STAINLESS STEEL SCREWS

SOCKET: Incandescent: MED BASE
Compact fluorescent: G23-2/ GX23-2/ G24Q-2
/G24Q-3/ GX24Q-3 / GX24Q-4
High Intensity Discharge: MED BASE

BALLAST: CLASS P, (ELECTRONIC AVAILABLE)

DIFFUSER: OPAL POLYCARBONATE

COATING: POWDER COAT PAINT.

**OPTIONS - PLEASE SPECIFY**

PHOTOMETRIC - PL 18W

LAMP: *COMPACT FLUORESCENT.*

INC60 - 60W; T10 MAX.

COMPACT FLUORESCENT:

PL9 - C.F. 9W; DOUB

PL13 - C.F. 13W; DOUBLE BIAX - 2PI

PL18 - C.F. 18W; TRIPLE BIAX - 4PIN

PL26 - C.F. 26W; TRIPLE BIAX - 4PIN

PL32 - C.F. 32W; TRIPLE BIAX - 4PIN

PL42 - C.F. 42W; QUAD BIAX - 4PIN

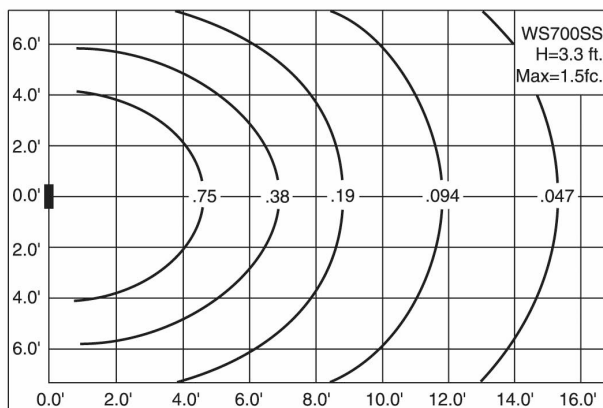
HIGH INTENSITY DISCHARGE:

HPS35 - LU 35W ; ED17 / BD17

HPS50 - LU 35W ; ED17 / BD17

MH 50 - MH 50W; ED17 / BD17

MH 70 - MH70W; ED17 / BD17



VOLTAGE: 120 - 120 VOLT 277 - 277 VOLT

[illegible]