

# LUMUX INC.


## INSTALLATION OPERATION INSTRUCTIONS

### PREPARING THE FIXTURE

- WARNING** - Before starting the installation, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.
- Remove Mounting Cover as shown in illustration, then pull out the Lamp Gear Tray to Install Lamps (by others) **Do Not Exceed Recommended Wattage.**
- Place the Lamp Gear Tray into Luminaire Enclosure, then install Enclosure Cover using six Mounting Screws as shown in illustration below.
- Make electrical connections: Connect grounding wire (green or bare copper) from the supply circuit to the green or bare copper wire(s) from the Luminaire. Connect the white wire from the Luminaire to the white wire of the supply circuit. Connect the black wire from the Luminaire to the black wire of the supply circuit. Use U.L. Listed wire connectors (by others). Secure wire connectors with U.L. Listed electrical tape (by others). Push all wire connections into the J-Box.
- Install Luminaire Arms with Cover to the Outlet Box (two required) by using two Screws (by others) as shown in illustration below.

**IMPORTANT:** In order to comply with established electrical code, the installer must seal the area around the Fixture Canopy and the Wall, with type of caulking compound such as GE 100% or Dow Corning 100% silicone to provide a watertight seal in accordance with the differing surface textures of the wall.

**NOTE: Install Junction Box Flush to the Wall.**

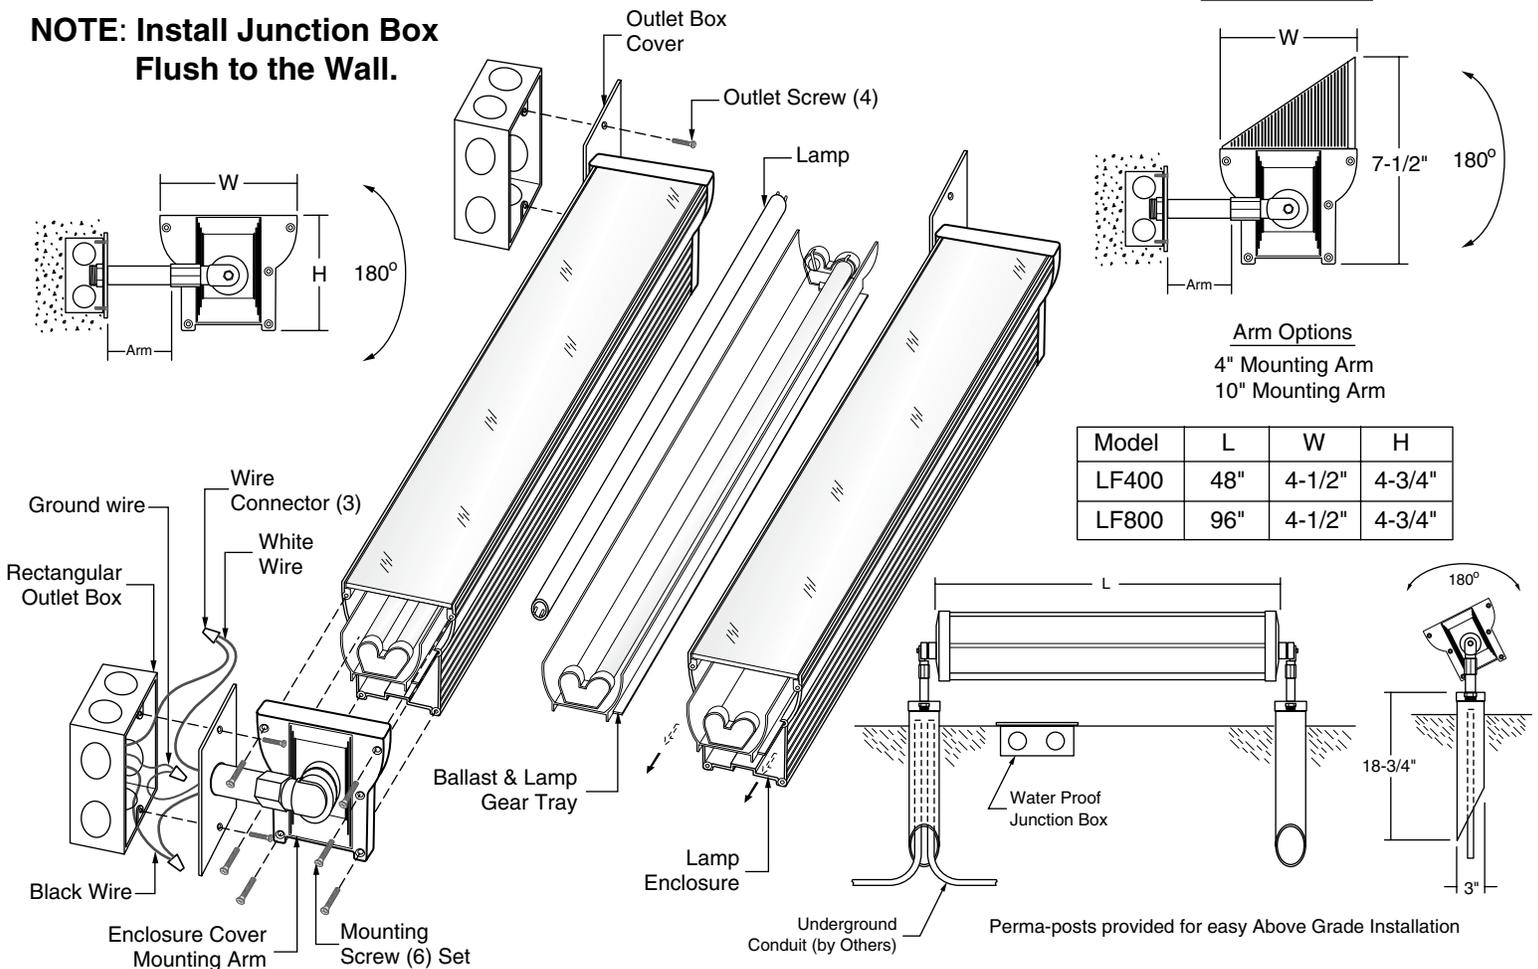

**SURFACE LUMINAIRE - WALL / GROUND MOUNT LF400, 800 Series**

LUMUX - ARCHITECTURAL LIGHTING COMPANY- Toll Free 877- 895-5552 www.Lumux.net