

LUMUX INC.

INSTALLATION OPERATION INSTRUCTIONS

PREPARING THE LUMINAIRE

SAVE THIS INSTRUCTIONS

Fig. 1

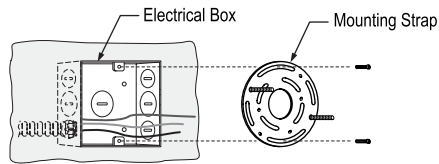


Fig. 2

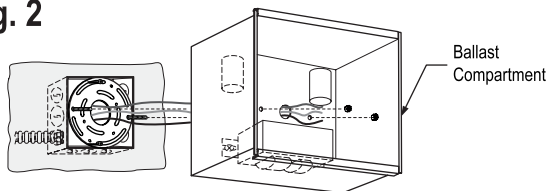


Fig. 3

Wire Diagram

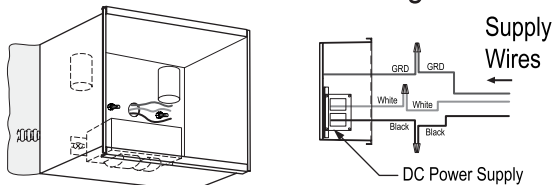


Fig. 4

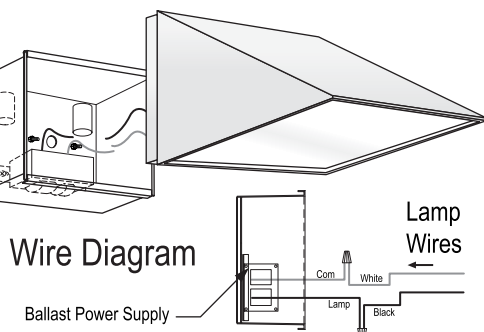


Fig. 5


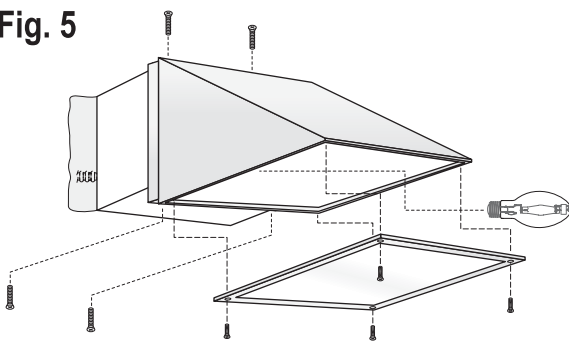


Fig. 6

Final Installation

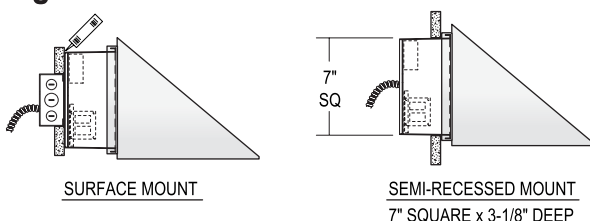

READ & UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLATION. IF YOU ARE NOT FAMILIAR WITH THE NATIONAL ELECTRICAL CODE (NEC), CONTACT A QUALIFIED ELECTRICIAN TO INSTALL THIS LUMINAIRE FOR YOU.

WARNING.- Before installing this luminaire or doing any maintenance, turn off the power supply at the circuit breaker or fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

Fig. 1.- Install Mounting Strap:

- 1.- Install mounting strap (provided) to electrical box and secure with two machine screws (by others), see Fig. 1.
- 2.- Run electrical supply wires through the inner hole of mounting strap, see Fig. 1.

Fig. 2.- Install Ballast Compartment:

- 1.- Insert power supply wires through ballast compartment, see Fig. 2.
- 2.- Align ballast compartment mounting holes to the machine screws on mounting strap and secure with the two mounting nuts (provided), see Fig. 2.

Fig. 3.- Supply Power Connections:

- 1.- Make electrical connections as shown in wire diagram, see Fig. 3.

Fig. 4.- Lamp Holder Connections:

- 1.- Make electrical connections as shown in wire diagram, see Fig. 4.
- 2.- Make sure all electrical wire connections are place inside the ballast compartment before installing the luminaire, see Fig. 4.

Fig. 5.- Install Luminaire:

- 1.- Place luminaire against the ballast compartment and secure with the four machine screws (provided), see Fig. 5.
- 2.- Remove luminaire face plate and install proper lamp type and wattage, **DO NOT EXCEED RECOMMENDED WATTAGE**, see Fig. 5.
- 3.- Replace luminaire face plate with four machine screws, see Fig. 5.

NOTE:

- 1.- In order to comply with established electrical code, the installer must seal the area around the Luminaire Ballast Compartment and the Wall, with type of caulking compound such as GE 100% or Dow Corning 100% silicone to provide a watertight seal in accordance with the differing surface textures of the wall.

SURFACE / SEMI-RECESSED LUMINAIRE - UD600

LUMUX - ARCHITECTURAL LIGHTING COMPANY- Toll Free 877- 895-5552 www.Lumux.net