

# LUMUX

## BOLLARD

### BL350S-2

The Lumux Bollard ("BL") series is a family of precision engineered, architectural LED bollards offered in a wide variety of form factors. Intended to illuminate a variety of outdoor spaces, whether public or private, the Lumux Bollard line offers multiple light distributions, including 360-degree shielded or unshielded, symmetric, and downward facing light.

The body is constructed from heavy-duty die-cast aluminum that is seamlessly integrated with its light source in a sleek, symmetrical design with no visible hardware. The Lumux Bollard combines form and function, offering architectural grade design while utilizing the highest quality of materials and components, providing long-lasting stability and durability that meets the most rigorous standards.

**Housing:** Heavy-duty construction of corrosion resistant, low copper extruded aluminum. All fasteners are vandal resistant stainless-steel screws.

**Lens:** Sealed one-piece, shatter proof, UV-rated polycarbonate.

**Mounting:** Secures with galvanized anchor bolts.

**Installation:** Mounting footplate

**Finish:** Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

**Driver:** Constant current and universal input voltage 120-277v, starting temperature rated at -20°F. Dimmable option available (0-10v).

**Gasket:** Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

**Protection Class:** IP65, ETL Listed for wet locations.

**Wattage:** 13W

**Color Temperature:** 2700K / 3000K / 3500K / 4000K

Delivered Lumens:	2700K	3000K	3500K	4000K
	600lm	675lm	810lm	900lm

**CRI:** 80 (4000K CRI 70)

**Warranty:** 5 year limited warranty

DATE:

PROJECT:


FIRM:

CATALOG NO.:

COMMENTS:



#### Dimensions:

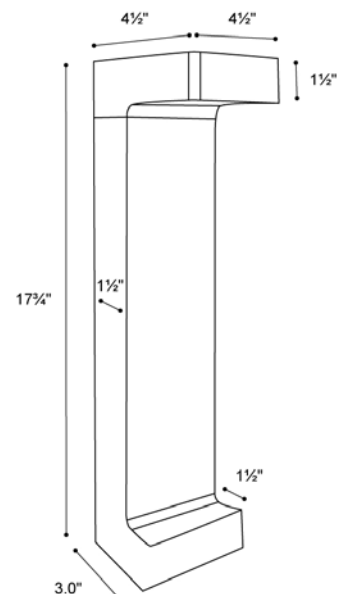

# LUMUX

## BOLLARD

BL350S-2

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:

### Ordering Guide:

Catalog No.	LED Color	Color Temp <sup>1</sup>	Voltage	Finish	Options <sup>2</sup>
BL350S-2	White	2700K	120-277v	Black	<input type="checkbox"/> Dimmable driver (0-10v)
		3000K		White	
		3500K		Silver	
		4000K		Bronze	
				Custom RAL <sup>2</sup>	

<sup>1</sup>Consult factory for additional options


<sup>2</sup>Consult factory for additional pricing

Catalog No.: \_\_\_\_\_

### Top View:



### Anchor bolt template:

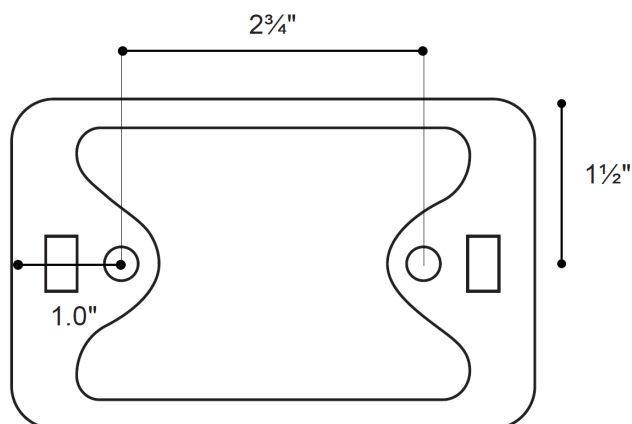

\*Lumen Maintenance Report (CREE XP-E):  
[https://cree-led.com/media/documents/LM80\\_Results.pdf](https://cree-led.com/media/documents/LM80_Results.pdf)