

**PREPARING THE LUMINAIRE**

**SURFACE LUMINAIRE: BL1000 "LED"**


**SAVE THIS INSTRUCTIONS**

READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLATION. IF YOU ARE NOT FAMILIAR WITH THE NATIONAL ELECTRICAL CODE (NEC), CONTACT A QUALIFIED ELECTRICIAN TO INSTALL THIS LUMINAIRE.

**WARNING.-** Before installing this luminaire or doing any maintenance, turn off the power supply at the circuit breaker or fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.


**NOTE:**

To re-lamp, replacement parts or additional information, contact or visit manufacturer at [www.lumux.net](http://www.lumux.net)

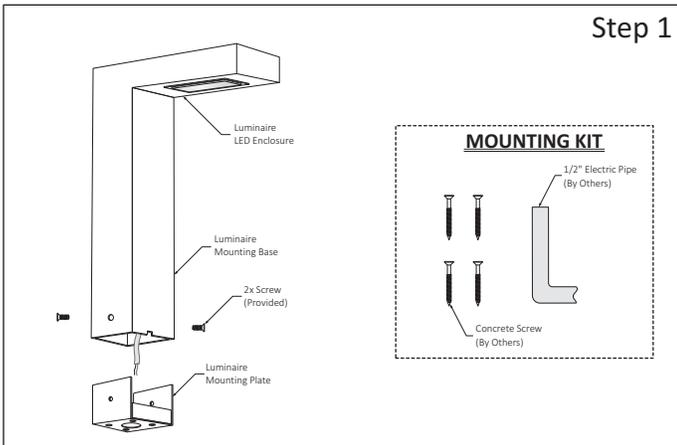


**Step 1 - Disassemble Luminaire Parts for easy Installation:**

a.- Remove Luminaire Mounting Plate from Luminaire Base.

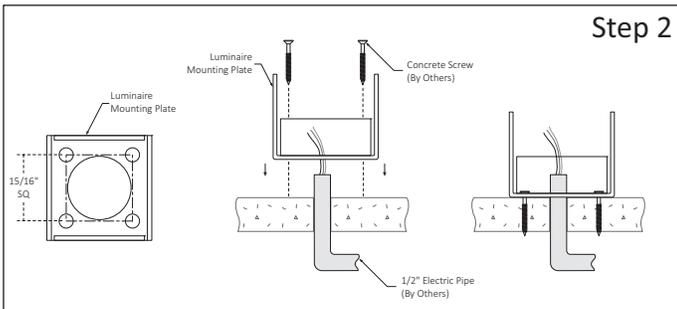


**Step 2 - Install Luminaire Mounting Plate:**

- a.- Place Mounting Plate on Mounting Surface allowing the Electric Pipe pass through the center hole.
- b.- Install the Plate to the surface using two or four # 8 (3/16" x 1-1/2") Concrete Screws by others.

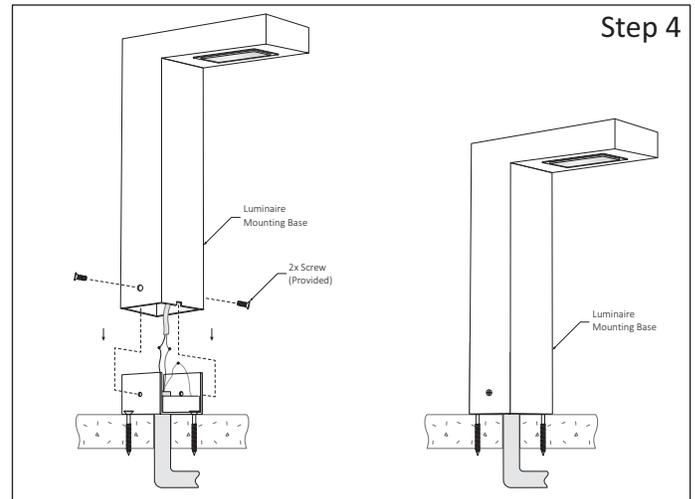


**Step 4 - Install Luminaire Mounting Base:**

a.- Place Luminaire Mounting Base onto the Mounting Surface, align the two holes and fasten it using the two Screws (provided).

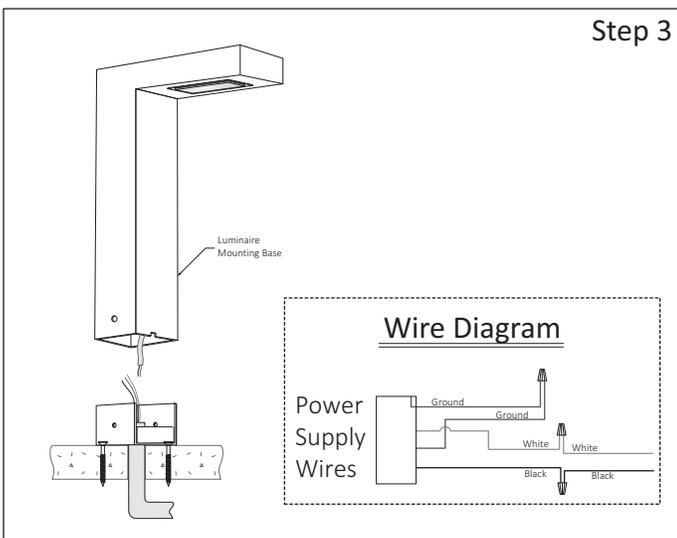

**Step 3 - Make Wiring Connections:**

a.- Place Luminaire Base close to the Mounting Base and make hard-wire connections, see Wire Diagram.

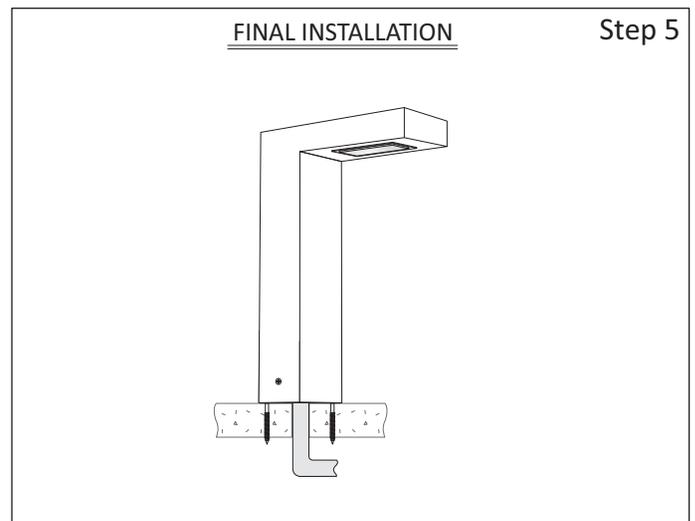

**FINAL INSTALLATION**

**Step 5**