

LUMUX

WALL SCONCES LEGACY

The Lumux L series combines architectural design and quality with high performance, and features a range of vandal resistant, wall and ceiling mounted luminaries with a variety of grill and visor options. Designed for accent lighting of walls and facades, the Lumux L series is constructed from the highest quality components and is built for optimal performance in any environment while offering elegant and attractive form factors.

Housing: Heavy-duty construction of one-piece, corrosion resistant, low-copper (<1% copper) die-cast aluminum. Enclosed lens secured with vandal resistant, stainless-steel screws.

Lens: One-piece injection molded white opal, 1/8" thick UV rated polycarbonate lens

Mounting: Surface mounted, wall or ceiling

Installation: Mounting bracket provided that fits any standard 3.0" or 4.0" J-Box

Finish: Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

Driver: Constant current and universal input voltage 120/277V, starting temperature rated at -20°F. Dimmable option available (0-10v).

Gasket: Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

Protection Class: IP65, ETL Listed for wet locations

Wattage: 21W

Color Temperature: 2700K / 3000K / 3500K / 4000K

Delivered Lumens: 2700K 3000K 3500K 4000K
799Lm 866Lm 1010Lm 1154Lm

Please consult factory for higher lumen packages

CRI: 90

Warranty: 5 year limited warranty

DATE:

PROJECT:


FIRM:

CATALOG NO.:

COMMENTS:



Dimensions:

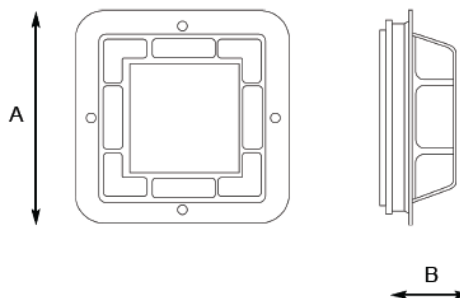

A : 11 3/4"
B : 4 1/2"

LUMUX

WALL SCONCES LEGACY

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:

Ordering Guide:

Catalog No.	LED Color	Color Temp ¹	Voltage	Finish	Options ²
Legacy	White	2700K	120/277	Black	<input type="checkbox"/> Dimmable driver (0-10v)
	Amber	3000K		White	
		3500K		Silver	
		4000K		Bronze	
				Custom RAL ²	

¹Consult factory for additional options

²Consult factory for additional pricing

Consult factory for compact fluorescent options

Catalog No.: _____