

LUMUX

WALL SCONCES

WS752

The Lumux Wall Sconce ("WS") series combines architectural design and quality with high performance, and features a range of vandal resistant, wall and ceiling mounted luminaries with a variety of grill and visor options.

Designed for accent lighting of walls and facades, the Lumux WS series is constructed from the highest quality components and is built for optimal performance in any environment while offering elegant and attractive form factors.



Housing: Heavy-duty construction of one-piece, corrosion resistant, low-copper (<1% copper) die-cast aluminum. Enclosed lens secured with vandal resistant, stainless-steel screws. ADA compliant.

Lens: One piece injection molded white opal, 1/8" thick, shatter proof polycarbonate lens.

Mounting: Surface mounted, wall or ceiling

Installation: Mounting bracket provided that fits any standard 3.0" or 4.0" J-Box

Finish: Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

Driver: Constant current and universal input voltage 120/277V, starting temperature rated at -20°F. Dimmable option available (0-10v).

Gasket: Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

Protection Class: IP65, ETL Listed for wet locations

Wattage: 21W

Color Temperature: 2700K / 3000K / 3500K / 4000K


Delivered Lumens:	2700K	3000K	3500K	4000K
	1734Lm	1880Lm	2192Lm	2505Lm

Please consult factory for higher lumen packages

CRI: 90

Warranty: 5 year limited warranty

Dimensions:

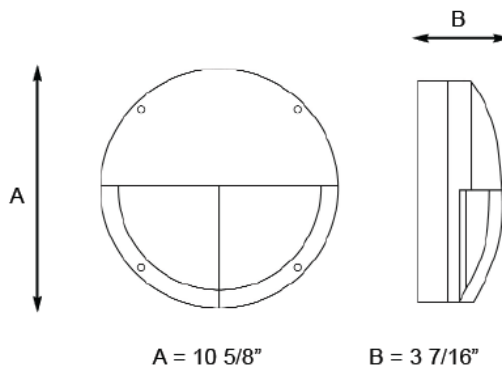

A = 10 5/8"

B = 3 7/16"

LUMUX

WALL SCONCES WS752

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:

Ordering Guide:

Catalog No.	LED Color	Color Temp ¹	Voltage	Finish	Options ²
WS752	White	2700K	120/277	Black	<input type="checkbox"/> Dimmable driver (0-10v)
		3000K		White	
		3500K		Silver	
		4000K		Bronze	
				Custom RAL ²	

¹Consult factory for additional options

²Consult factory for additional pricing

Consult factory for compact fluorescent options

Catalog No.: _____