

LUMUX

STEP LIGHTS

SLS100

The Lumux SLS series is a family of precision engineered, surface-mounted LED architectural step lights that are designed for durability and performance. Constructed from the highest quality materials and components, this step light is offered in a wide array of form factors and grill options to fit any specification. A diecast aluminum body is seamlessly integrated with its faceplate with captive, vandal resistant stainless-steel screws. This step light features a frosty glass diffuser, reducing glare, and is energy efficient for long-lasting indoor and outdoor applications.

Housing: Heavy-duty construction of corrosion resistant, low-copper die cast aluminum. Faceplate secured with vandal resistant, stainless-steel screws.

Lens: 1/8" thick shatter proof frosty glass diffuser

Mounting: Surface mounted

Installation: Installs into a standard j-box (please refer to installation instructions)

Finish: Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

Driver: Constant current input voltage 120v or 277V, starting temperature rated at -20°F.

Gasket: Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

Protection Class: IP65, ETL Listed for wet locations

Wattage: 2.7W

Color Temperature: 2700K / 3000K / 3500K / 4000K

Delivered Lumens :	2700K	3000K	3500K	4000K
	68Lm	75Lm	88Lm	100Lm

CRI: 90

Warranty: 5 year limited warranty

DATE:

PROJECT:


FIRM:

CATALOG NO.:

COMMENTS:



Dimensions:

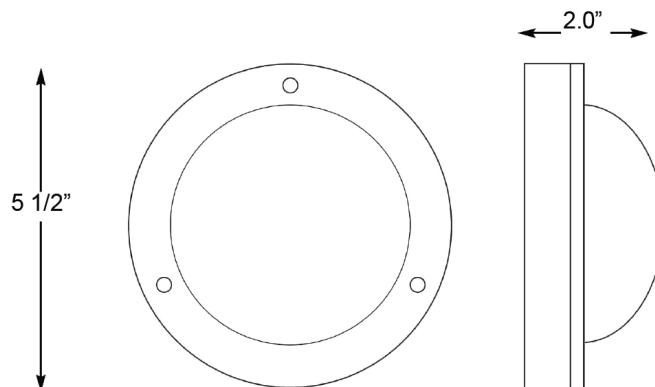

LUMUX

STEP LIGHTS

SLS100

DATE:	
PROJECT:	
FIRM:	
CATALOG NO.:	
COMMENTS:	

Ordering Guide:

Catalog No.	LED Color	Color Temp ¹	Voltage	Finish
SLS100	White	2700K	120	Black
	Blue	3000K	277	White
	Green	3500K		Silver
	Red	4000K		Bronze
	Amber			Custom RAL ²

¹ Color Temperature applies only to White LED Color

¹ Consult factory for additional options

² Consult factory for pricing

Catalog No.: _____